

7392 Count Cir, Huntington Beach, CA 92647  
Phone: (714) 596-4461

PART #	DESCRIPTION
DT922062	20-UP JT REAR SWAY BAR RELOCATION KIT

COMPONENTS INCLUDED	
(2) 127210 20-UP JT REAR SWAY BAR RELOCATION BLOCK	
HARDWARE INCLUDED	
(4) 605133 3/8" FLAT WASHER	(4) 605100 3/8-16 X .750 BOLT
TOOLS REQUIRED	
JACK JACK STANDS TORQUE WRENCH	9/16" SOCKET / WRENCH 15MM SOCKET / WRENCH
TECH NOTES	
N/A	



WARNING!
<b>** READ ALL INSTRUCTIONS THOROUGHLY FROM START TO FINISH BEFORE BEGINNING INSTALLATION! IF THESE INSTRUCTIONS ARE NOT PROPERLY FOLLOWED SEVERE FRAME, SUSPENSION AND TIRE DAMAGE MAY RESULT TO THE VEHICLE!</b>
<b>** DYNATRAC RECOMMENDS THAT YOU EXERCISE EXTREME CAUTION WHEN WORKING UNDER A VEHICLE THAT IS SUPPORTED WITH JACK STANDS.</b>
<b>** DYNATRAC RECOMMENDS ALL INSTALLATION TO BE PERFORMED BY A PROFESSIONAL SHOP/SERVICE TECHNICIAN. PRODUCT FAILURE CAUSED BY IMPROPER INSTALLATION WILL NOT BE COVERED UNDER DYNATRAC'S WARRANTY POLICY.</b>


## INSTALLATION

- Using a properly rated jack, raise the rear of the vehicle and support the frame rails with jack stands. Ensure the jack stands are secure and set properly before lowering the jack. NEVER WORK UNDER AN UNSUPPORTED VEHICLE.
- Remove the sway bar from the differential using a 15mm. [FIGURE 1]

FIG.1




FIG.2

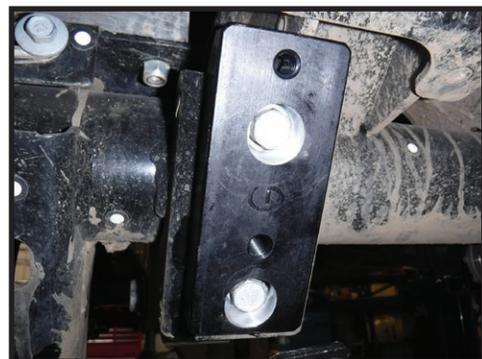

- Mount DYNATRAC relocation block using the factory hardware and a 15mm socket/wrench. [Torque to factory spec] [FIGURE 2]

4. Mount the sway bar to the relocation block using the supplied 3/8" hardware and a 9/16". [Torque to 30 ft-lbs] [FIGURE 3]

FIG.3

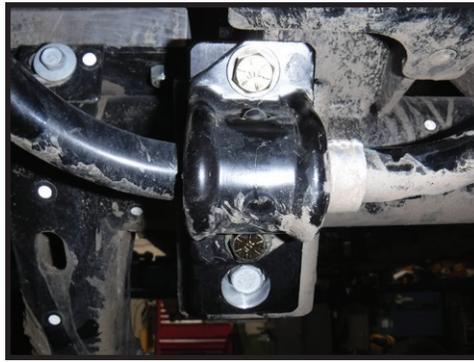

**VERIFY ALL FASTENERS ARE PROPERLY TORQUED BEFORE DRIVING VEHICLE.**

**RETORQUE ALL NUTS, BOLTS AND LUGS AFTER 100 MILES AND PERIODICALLY THEREAFTER.**

### **DYNATRAC LIMITED LIFETIME WARRANTY**

DYNATRAC warrants to the original retail purchaser who owns the vehicle on which the product was originally installed. DYNATRAC does not warrant the product for finish, alterations, modifications and/or installation contrary to DYNATRAC instructions. DYNATRAC products are not designed, nor are they intended to be installed on vehicles used in race applications, for racing purposes or for similar activities. (A "race" is defined as any contest between two or more vehicles, or a contest of one or more vehicles against the clock, whether or not such contest is for a prize). This warranty does not include coverage for police or taxi vehicles, race vehicles, or vehicles used for government or commercial purposes. Also excluded from this warranty are sales outside of the United States of America and Canada.

DYNATRAC'S obligation under this warranty is limited to the repair or replacement, at DYNATRAC'S discretion, of the defective product. Any and all costs of removal, installation or re-installation, freight charges and incidental or consequential damages are expressly excluded from this warranty. Items that are subject to wear are not considered defective when worn and are not covered.

DYNATRAC components must be installed as a complete kit as shown in our current application guide. Any substitutions or exemptions of required components will immediately void the warranty. Some finish damage may happen to parts during shipping and is not covered under warranty.

This warranty is expressly in lieu of all other warranties expressed or implied. This warranty shall not apply to any product that has been improperly installed, modified or customized subject to accident, negligence, abuse or misuse.

# **DYNATRAC**

**CONFIDENCE TO EXPLORE®**

7392 Count Cir, Huntington Beach, CA 92647 Phone: (714) 596-4461  
[www.dynatrac.com](http://www.dynatrac.com)

